

13SL127610 / 13SL127410
13SL123701 / 13SL120763

FEATURES

- DC 12-24V
- 26 Flash patterns
- Max Qty of SYNC'D Heads: 15 units
- Meets IP67 ingress protection standards
- -30°C to +60°C extreme temperature reliability
- With memory function
- Approval: CE, ECE R10, ECE R65 XA1/XB1, CISPR 25 Class 3 certified

WIRE

RED..... +VDC

BLACK.....- GROUND

YELLOW.... Pattern Selection

.....Apply Yellow to Black


.....Less than 1 second for next pattern

.....1 to 3 seconds for previous pattern

.....3 to 5 seconds back to pattern #1

.....More than 5 seconds for turn off. When power is reapplied, it will resume the previous pattern.

WHITE..... Synchronization. Connect white wire of all heads together for synchronization.

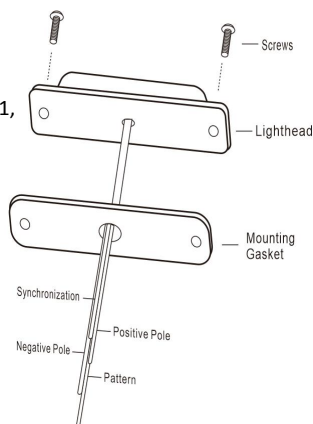

FLASH PATTERNS

1	Single flash ECE	14	Triple flash - Alternate
2	Single flash - Slow	15	Quad flash - Alternate
3	Double flash ECE	16	Octa flash - Fast - Alternate
4	Double flash - Slow	17	Single flash - split
5	Triple flash	18	Double flash - split
6	Quad flash - Fast ECE	19	Quad flash - split
7	Quad flash - Slow	20	Octa flash - split
8	Octa flash - Fast	21	Single flash - split accelerate
9	Octa flash - Slow	22	Double flash - split accelerate
10	Twelve flash	23	SOS flash
11	Sixteen flash	24	Cycle(1,8,3,9,4,18)
12	Single flash - Alternate	25	Cycle(2,7,9,11,19,21)
13	Double flash - Alternate	26	Steady on



WARNING!

Do not look directly into LEDs while in operation; this may cause momentary blindness and/or eye damage.